

# Modular International, Inc.

 tunable white LED modules

70mm and  
90mm LED  
modules  
available with  
filter rings,  
shielding  
cylinders, and  
filter media.



# Modular Multiples®

The Original Multiple Light Family of Fixtures



## Available 70mm LED Modules

All delivered lumen values were tested at 2700K, 3500K, and 6500K with finish ring at nominal mA rates & below. Available Tunable White color spectrum is 2700K - 6500K.

| Model Number | Watts | Beam Angle | CRI | Delivered Lumens | Lumens per watt | Tested K-Temp |
|--------------|-------|------------|-----|------------------|-----------------|---------------|
| LEDTW-710-40 | 10.6  | 40°        | 96+ | 586.1            | 55.3            | 2700K         |
| LEDTW-710-50 | 10.7  | 50°        | 96+ | 606.9            | 56.7            | 2700K         |
| LEDTW-710-13 | 10.7  | 13°        | 96+ | 610.4            | 57.0            | 2700K         |
| LEDTW-710-30 | 10.6  | 30°        | 96+ | 619.7            | 58.4            | 2700K         |
| LEDTW-710-40 | 10.6  | 40°        | 97+ | 644.0            | 60.8            | 3500K         |
| LEDTW-710-50 | 10.7  | 50°        | 97+ | 659.7            | 61.7            | 3500K         |
| LEDTW-710-13 | 10.6  | 13°        | 97+ | 661.8            | 62.4            | 3500K         |
| LEDTW-710-30 | 10.5  | 30°        | 97+ | 674.7            | 64.3            | 3500K         |
| LEDTW-710-40 | 10.6  | 40°        | 94+ | 717.8            | 67.7            | 6500K         |
| LEDTW-710-50 | 10.6  | 50°        | 94+ | 741.2            | 69.9            | 6500K         |
| LEDTW-710-13 | 10.6  | 13°        | 94+ | 743.7            | 70.2            | 6500K         |
| LEDTW-710-30 | 10.6  | 30°        | 94+ | 759.8            | 71.7            | 6500K         |
| LEDTW-711-40 | 11.4  | 40°        | 95+ | 640.8            | 56.2            | 2700K         |
| LEDTW-711-15 | 11.4  | 15°        | 95+ | 648.0            | 56.8            | 2700K         |
| LEDTW-711-50 | 11.4  | 50°        | 95+ | 656.9            | 57.6            | 2700K         |
| LEDTW-711-30 | 11.4  | 30°        | 95+ | 672.6            | 59.0            | 2700K         |
| LEDTW-711-40 | 11.3  | 40°        | 97+ | 736.6            | 65.2            | 3500K         |
| LEDTW-711-15 | 11.4  | 15°        | 97+ | 720.2            | 63.2            | 3500K         |
| LEDTW-711-50 | 11.3  | 50°        | 97+ | 720.6            | 63.8            | 3500K         |
| LEDTW-711-30 | 11.3  | 30°        | 97+ | 736.6            | 65.2            | 3500K         |
| LEDTW-711-40 | 11.4  | 40°        | 94+ | 781.5            | 68.6            | 6500K         |
| LEDTW-711-15 | 11.4  | 15°        | 94+ | 799.1            | 70.1            | 6500K         |
| LEDTW-711-50 | 11.4  | 50°        | 94+ | 811.0            | 71.1            | 6500K         |
| LEDTW-711-30 | 11.4  | 30°        | 94+ | 819.8            | 71.9            | 6500K         |
| LEDTW-712-40 | 12.3  | 40°        | 96+ | 866.1            | 70.4            | 2700K         |
| LEDTW-712-18 | 12.4  | 18°        | 96+ | 886.4            | 71.5            | 2700K         |
| LEDTW-712-50 | 12.2  | 50°        | 96+ | 891.9            | 73.1            | 2700K         |
| LEDTW-712-30 | 12.2  | 30°        | 96+ | 905.4            | 74.2            | 2700K         |
| LEDTW-712-40 | 12.3  | 40°        | 97+ | 935.9            | 76.1            | 3500K         |
| LEDTW-712-18 | 12.3  | 18°        | 97+ | 958.4            | 77.9            | 3500K         |
| LEDTW-712-50 | 12.4  | 50°        | 97+ | 974.5            | 78.6            | 3500K         |
| LEDTW-712-30 | 12.3  | 30°        | 97+ | 982.2            | 79.9            | 3500K         |
| LEDTW-712-40 | 12.4  | 40°        | 90+ | 1008.0           | 81.3            | 6500K         |
| LEDTW-712-18 | 12.4  | 18°        | 90+ | 1028.0           | 82.9            | 6500K         |
| LEDTW-712-50 | 12.4  | 50°        | 90+ | 1050.0           | 84.7            | 6500K         |
| LEDTW-712-30 | 12.4  | 30°        | 90+ | 1059.0           | 85.4            | 6500K         |
| LEDTW-714-40 | 14.2  | 40°        | 96+ | 1018.0           | 71.7            | 2700K         |
| LEDTW-714-50 | 14    | 50°        | 96+ | 1044.0           | 74.6            | 2700K         |
| LEDTW-714-18 | 14.1  | 18°        | 96+ | 1049.0           | 74.4            | 2700K         |
| LEDTW-714-30 | 14.1  | 30°        | 96+ | 1092.0           | 77.4            | 2700K         |
| LEDTW-714-40 | 14.2  | 40°        | 97+ | 1119.0           | 78.8            | 3500K         |
| LEDTW-714-50 | 14.2  | 50°        | 97+ | 1147.0           | 80.8            | 3500K         |
| LEDTW-714-18 | 14.2  | 18°        | 97+ | 1162.0           | 81.8            | 3500K         |
| LEDTW-714-30 | 14.1  | 30°        | 97+ | 1187.0           | 84.2            | 3500K         |
| LEDTW-714-40 | 14.2  | 40°        | 90+ | 1178.0           | 83.0            | 6500K         |
| LEDTW-714-50 | 14.2  | 50°        | 90+ | 1211.0           | 85.3            | 6500K         |
| LEDTW-714-18 | 14.3  | 18°        | 90+ | 1225.0           | 85.7            | 6500K         |
| LEDTW-714-30 | 14.3  | 30°        | 90+ | 1256.0           | 87.8            | 6500K         |


- Filter Ring (-FR) addition produces a light loss factor of 10-12% prior to filter media being added. Consult factory for .ies files and final output data when specifying filter media.
- Shielding Cylinder (-CY) addition produces a light loss factor of 20-22% prior to filter media being added. Consult factory for .ies files and final output data when specifying filter media.
- L70 reported at 85°C = > 55,000 hours (L70B50 calculated) 200,000 hours.
- L80 reported at 85°C = >55,000 hours (L80B50 calculated) 123,000 hours.
- L90 reported at 85°C = > 55,000 hours (L90B50 calculated) 56,000 hours.

| Lumen Maintenance |         |                       |                       |                       |
|-------------------|---------|-----------------------|-----------------------|-----------------------|
| Ambient Temp.     | TM-21   | L70 hours Theoretical | L80 hours Theoretical | L90 hours Theoretical |
| 25°C              | > 90.98 | 200,000               | 123,000               | 56,000                |

Please consult factory for additional information

- IES files (also available on website)
- Photometric reports
- TM-30 reports
- ISO diagrams and measurements
- UGR ratings and evaluations

Model # example: LED-710-13



# Modular Multiples®

The Original Multiple Light Family of Fixtures



tunable  
white

Available 70mm LED Modules




## Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


### LEDTW-714-18

| 1m       | 2m       | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft   | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 6477 lx  | 1619 lx  | 720 lx  | 405 lx  | 259 lx  | 180 lx  | 132 lx  | 101 lx  | 80 lx   | 65 lx   | 54 lx   | 45 lx   | 38 lx   | 33 lx   | 29 lx   | 25 lx   | 22 lx   | 20 lx   | 18 lx   | 16 lx   |
| 601.7 fc | 150.4 fc | 66.9 fc | 37.6 fc | 24.1 fc | 16.7 fc | 12.3 fc | 9.4 fc  | 7.4 fc  | 6.0 fc  | 5.0 fc  | 4.2 fc  | 3.6 fc  | 3.1 fc  | 2.7 fc  | 2.4 fc  | 2.1 fc  | 1.9 fc  | 1.7 fc  | 1.5 fc  |




### LEDTW-714-30

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 2599 lx  | 650 lx  | 289 lx  | 162 lx  | 104 lx  | 72 lx   | 53 lx   | 41 lx   | 32 lx   | 26 lx   | 21 lx   | 18 lx   | 15 lx   | 13 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    |
| 314.6 fc | 78.7 fc | 35.0 fc | 19.7 fc | 12.6 fc | 8.7 fc  | 6.4 fc  | 4.9 fc  | 3.9 fc  | 3.1 fc  | 2.6 fc  | 2.2 fc  | 1.9 fc  | 1.6 fc  | 1.4 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  | 0.9 fc  | 0.8 fc  |

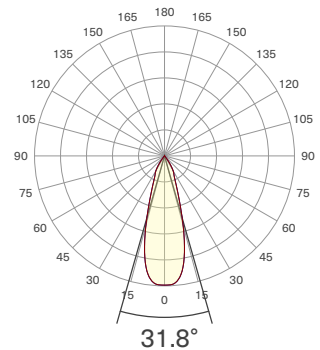


### LEDTW-714-40

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 2098 lx  | 524 lx  | 233 lx  | 131 lx  | 84 lx   | 58 lx   | 43 lx   | 33 lx   | 26 lx   | 21 lx   | 17 lx   | 15 lx   | 12 lx   | 11 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 6 lx    | 5 lx    |
| 194.9 fc | 48.7 fc | 21.7 fc | 12.2 fc | 7.8 fc  | 5.4 fc  | 4.0 fc  | 3.0 fc  | 2.4 fc  | 1.9 fc  | 1.6 fc  | 1.4 fc  | 1.2 fc  | 1.0 fc  | 0.9 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  | 0.5 fc  | 0.5 fc  |

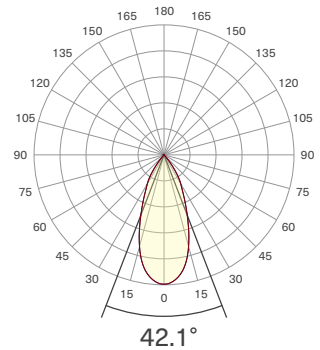

### LEDTW-714-50

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 1653 lx  | 413 lx  | 184 lx  | 103 lx  | 66 lx   | 46 lx   | 34 lx   | 26 lx   | 20 lx   | 17 lx   | 14 lx   | 11 lx   | 10 lx   | 8 lx    | 7 lx    | 6 lx    | 6 lx    | 5 lx    | 5 lx    | 4 lx    |
| 153.6 fc | 38.4 fc | 17.1 fc | 9.6 fc  | 6.1 fc  | 4.3 fc  | 3.1 fc  | 2.4 fc  | 1.9 fc  | 1.5 fc  | 1.3 fc  | 1.1 fc  | 0.9 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  | 0.5 fc  | 0.5 fc  | 0.4 fc  | 0.4 fc  |



# Modular Multiples®

The Original Multiple Light Family of Fixtures

## tunable white Available 90mm LED Modules



All delivered lumen values were tested at 2700K, 3500K, and 6500K with finish ring at nominal mA rates & below. Available Tunable White color spectrum is 2700K - 6500K.

| Model Number | Watts | Beam Angle | CRI | Lumens Delivered | Lumens per watt | Tested K-Temp |
|--------------|-------|------------|-----|------------------|-----------------|---------------|
| LEDTW-917-45 | 17.4  | 45°        | 96+ | 1548.0           | 88.9            | 2700K         |
| LEDTW-917-30 | 17.5  | 30°        | 96+ | 1578.0           | 90.1            | 2700K         |
| LEDTW-917-60 | 17.4  | 60°        | 96+ | 1582.0           | 90.9            | 2700K         |
| LEDTW-917-90 | 17.5  | 90°        | 96+ | 1633.0           | 93.3            | 2700K         |
| LEDTW-917-45 | 17.3  | 45°        | 97+ | 1690.0           | 97.6            | 3500K         |
| LEDTW-917-30 | 17.3  | 30°        | 97+ | 1714.0           | 99.0            | 3500K         |
| LEDTW-917-60 | 17.3  | 60°        | 97+ | 1715.0           | 99.1            | 3500K         |
| LEDTW-917-90 | 17.4  | 90°        | 97+ | 1807.0           | 103.8           | 3500K         |
| LEDTW-917-45 | 17.5  | 45°        | 90+ | 1801.0           | 102.9           | 6500K         |
| LEDTW-917-30 | 17.5  | 30°        | 90+ | 1820.0           | 104.0           | 6500K         |
| LEDTW-917-60 | 17.5  | 60°        | 90+ | 1864.0           | 106.5           | 6500K         |
| LEDTW-917-90 | 17.5  | 90°        | 90+ | 1911.0           | 109.2           | 6500K         |
| LEDTW-922-45 | 22.1  | 45°        | 96+ | 1970.0           | 89.1            | 2700K         |
| LEDTW-922-30 | 22.1  | 30°        | 96+ | 1980.0           | 89.5            | 2700K         |
| LEDTW-922-60 | 22.3  | 60°        | 96+ | 2003.0           | 89.8            | 2700K         |
| LEDTW-922-90 | 22.3  | 90°        | 96+ | 2081.0           | 93.3            | 2700K         |
| LEDTW-922-45 | 21.7  | 45°        | 97+ | 2174.0           | 100.1           | 3500K         |
| LEDTW-922-30 | 21.7  | 30°        | 97+ | 2187.0           | 100.7           | 3500K         |
| LEDTW-922-60 | 21.8  | 60°        | 97+ | 2207.0           | 101.2           | 3500K         |
| LEDTW-922-90 | 21.9  | 90°        | 97+ | 2298.0           | 104.9           | 3500K         |
| LEDTW-922-45 | 22.3  | 45°        | 90+ | 2293.0           | 102.8           | 6500K         |
| LEDTW-922-30 | 22.3  | 30°        | 90+ | 2298.0           | 103.0           | 6500K         |
| LEDTW-922-60 | 22.4  | 60°        | 90+ | 2355.0           | 105.1           | 6500K         |
| LEDTW-922-90 | 22.4  | 90°        | 90+ | 2457.0           | 109.6           | 6500K         |

- Filter Ring (-FR) addition produces a light loss factor of 10-12% prior to filter media being added. Consult factory for .ies files and final output data when specifying filter media.

- Shielding Cylinder (-CY) addition produces a light loss factor of 20-22% prior to filter media being added. Consult factory for .ies files and final output data when specifying filter media.

- L70 reported at 85°C = > 55,000 hours (L70B50 calculated) 200,000 hours.

- L80 reported at 85°C = >55,000 hours (L80B50 calculated) 123,000 hours.


- L90 reported at 85°C = > 55,000 hours (L90B50 calculated) 56,000 hours.

| Lumen Maintenance |         |                       |                       |                       |
|-------------------|---------|-----------------------|-----------------------|-----------------------|
| Ambient Temp.     | TM-21   | L70 hours Theoretical | L80 hours Theoretical | L90 hours Theoretical |
| 25°C              | > 90.98 | 200,000               | 123,000               | 56,000                |

Please consult factory for additional information

- IES files (also available on website)
- Photometric reports
- TM-30 reports
- ISO diagrams and measurements
- UGR ratings and evaluations

Model # example: LED-917-30



# Modular Multiples®

The Original Multiple Light Family of Fixtures



tunable  
white

Available 90mm LED Modules




## Beam Details

All information shown below measured with filter ring installed. Filter media and shielding options available.


### LEDTW-922-30

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 3871 lx  | 968 lx  | 430 lx  | 242 lx  | 155 lx  | 108 lx  | 79 lx   | 60 lx   | 48 lx   | 39 lx   | 32 lx   | 27 lx   | 23 lx   | 20 lx   | 17 lx   | 15 lx   | 13 lx   | 12 lx   | 11 lx   | 10 lx   |
| 359.6 fc | 89.9 fc | 40.0 fc | 22.5 fc | 14.4 fc | 10.0 fc | 7.3 fc  | 5.6 fc  | 4.4 fc  | 3.6 fc  | 3.0 fc  | 2.5 fc  | 2.1 fc  | 1.8 fc  | 1.6 fc  | 1.4 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  | 0.9 fc  |

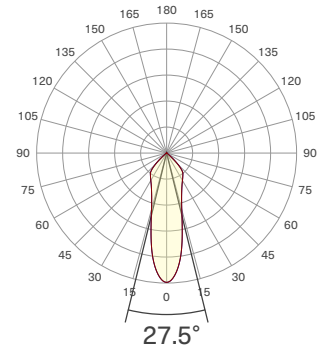


### LEDTW-922-45

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 2635 lx  | 659 lx  | 293 lx  | 165 lx  | 105 lx  | 73 lx   | 54 lx   | 41 lx   | 33 lx   | 26 lx   | 22 lx   | 18 lx   | 16 lx   | 13 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 7 lx    |
| 244.8 fc | 61.2 fc | 27.2 fc | 15.3 fc | 9.8 fc  | 6.8 fc  | 5.0 fc  | 3.8 fc  | 3.0 fc  | 2.4 fc  | 2.0 fc  | 1.7 fc  | 1.4 fc  | 1.2 fc  | 1.1 fc  | 1.0 fc  | 0.8 fc  | 0.8 fc  | 0.7 fc  | 0.6 fc  |

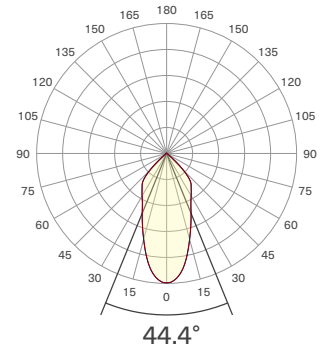


### LEDTW-922-60

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 2325 lx  | 581 lx  | 258 lx  | 145 lx  | 93 lx   | 65 lx   | 47 lx   | 36 lx   | 29 lx   | 23 lx   | 19 lx   | 16 lx   | 14 lx   | 12 lx   | 10 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 6 lx    |
| 216.0 fc | 54.0 fc | 24.0 fc | 13.5 fc | 8.6 fc  | 6.0 fc  | 4.4 fc  | 3.4 fc  | 2.7 fc  | 2.2 fc  | 1.8 fc  | 1.5 fc  | 1.3 fc  | 1.1 fc  | 1.0 fc  | 0.8 fc  | 0.7 fc  | 0.7 fc  | 0.6 fc  | 0.5 fc  |



### LEDTW-922-90

| 1m       | 2m      | 3m      | 4m      | 5m      | 6m      | 7m      | 8m      | 9m      | 10m     | 11m     | 12m     | 13m     | 14m     | 15m     | 16m     | 17m     | 18m     | 19m     | 20m     |
|----------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| 3.3 ft   | 6.6 ft  | 9.8 ft  | 13.1 ft | 16.4 ft | 19.7 ft | 23.0 ft | 26.2 ft | 29.5 ft | 32.8 ft | 36.1 ft | 39.4 ft | 42.7 ft | 45.9 ft | 49.2 ft | 52.5 ft | 55.8 ft | 59.1 ft | 62.3 ft | 65.6 ft |
| 1320 lx  | 330 lx  | 147 lx  | 83 lx   | 53 lx   | 37 lx   | 27 lx   | 21 lx   | 16 lx   | 13 lx   | 11 lx   | 9 lx    | 8 lx    | 7 lx    | 6 lx    | 5 lx    | 5 lx    | 4 lx    | 4 lx    | 3 lx    |
| 122.7 fc | 30.7 fc | 13.6 fc | 7.7 fc  | 4.9 fc  | 3.4 fc  | 2.5 fc  | 1.9 fc  | 1.5 fc  | 1.2 fc  | 1.0 fc  | 0.9 fc  | 0.7 fc  | 0.6 fc  | 0.5 fc  | 0.5 fc  | 0.4 fc  | 0.4 fc  | 0.3 fc  | 0.3 fc  |




# Modular Multiples®

The Original Multiple Light Family of Fixtures

## Fixture Options


### Extendable Yokes

ADD -EY TO END OF MODEL NUMBER

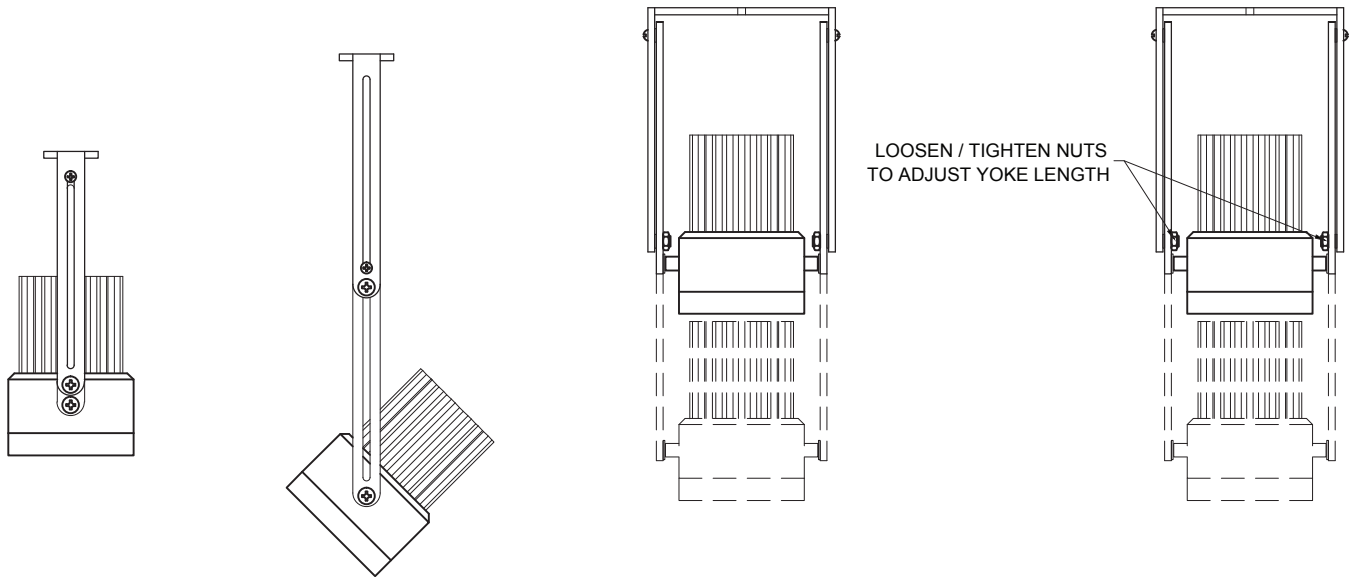

### Shielding Options


ADD SHIELDING OPTION CODE (BELOW) TO END OF MODEL NUMBER

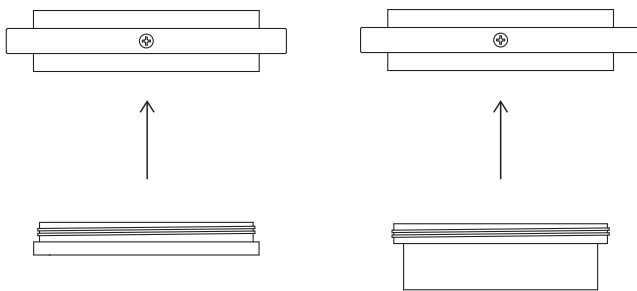

FILTER RING (STANDARD)

SHIELDING CYLINDER (-CY)

### Lutron Athena Wireless Nodes

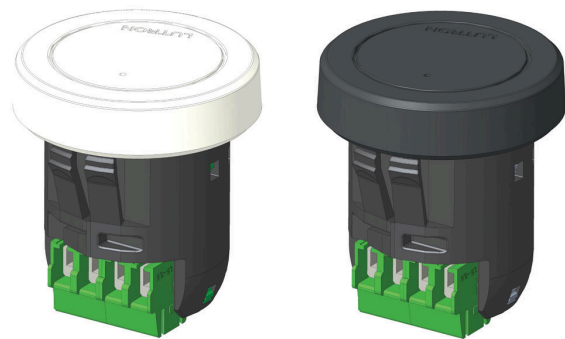


ATHENA WIRELESS NODE  
WHITE (AWN-WH)

ATHENA WIRELESS NODE  
BLACK (AWN-BL)

### Filter Media

ADD FILTER MEDIA CODE (BELOW) TO END OF MODEL NUMBER

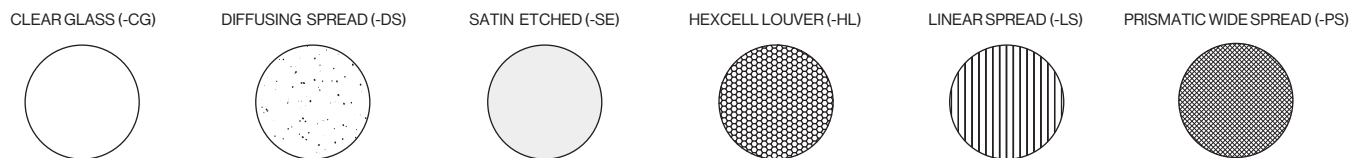

CLEAR GLASS (-CG)

DIFFUSING SPREAD (-DS)

SATIN ETCHED (-SE)

HEXCELL LOUVER (-HL)

LINEAR SPREAD (-LS)

PRISMATIC WIDE SPREAD (-PS)

70mm and  
90mm LED  
modules  
available with  
filter rings,  
shielding  
cylinders, and  
filter media.

# Modular International, Inc.



tunable white LED modules

